

Week 4 Lecture 2

**NWEN 241**  
**Systems Programming**

Jyoti Sahni

`Jyoti.sahni@ecs.vuw.ac.nz`

# Content

- More on Pointers
- Storage Classes
- C Process Layout

# Recap: Usage of Pointers

- 1) Provide an alternative means of accessing information stored in arrays
- 2) Provide an alternative (and more efficient) means of passing parameters to functions
- 3) Enable dynamic data structures, that are built up from blocks of memory allocated from the heap at run time

# Structures and Pointers

- **A struct pointer can be used to point to a struct**
- Example:

```
typedef struct {  
    char name [20];  
    int student_id;  
    int age;  
} StudentInfo;  
  
StudentInfo s = { "John Doe", 12345, 20};  
StudentInfo *sp = &s;
```

# Accessing and Manipulating struct Pointers

- We can reference a component of a structure pointer by the **indirect component selection operator**, which is a `->`, e.g.

```
strcpy(sp->name, "John Smith");  
sp->age = 18;  
printf("%s is in age %d\n", sp->name, sp->age);
```

- The **indirect component selection operator** has level 1 priority in the operator precedence

# Passing Function Parameters

- Recall:

## *Function definition*

```
int add ( int a, int b )  
{  
    return a + b;  
}
```

Formal parameters

## *Actual function call*

```
int i = 1, j = 2;  
int k = add(i, j);
```

Actual parameters

# Call by Value

```
int add ( int a, int b )  
{  
    return a + b;  
}
```

Formal parameters

```
int i = 1, j = 2;  
int k = add(i, j);
```

Actual parameters

- The values of **actual parameters** (i, j) are copied to **formal parameters** (a, b)
  - Actual and formal parameters are separate entities
- What happens thereafter to formal parameters has no effect on actual parameters
  - Any changes on **a, b** will not be transferred back to **i, j**

# Example

```
void swap( int a, int b )  
{  
    int temp = a;  
    a = b;  
    b = temp;  
}
```

```
int i = 5;  
int j = 10;  
swap( i, j );  
printf("%d %d", i, j);
```

Output

```
5 10
```

- After call to `swap()`, `i` and `j` values remain unchanged
- During execution of `swap()`, the copies of `i` and `j` are swapped inside the function, but not `i` and `j` themselves!



# The Solution: Call by Reference

- Pass a **copy** of the address to the function
- **Both formal and actual parameters refer to the same address**
- This can be done using pointers as function parameters

```
void swap( int *a, int *b )
{
    int temp = *a;
    *a = *b;
    *b = temp;
}
```

```
int i = 5;
int j = 10;
swap( &i, &j );
printf("%d %d", i, j);
```

Output

```
10 5
```

# Why Not Swap the Pointers?

```
void swap( int *a, int *b )
{
    int *temp = a;
    a = b;
    b = temp;
}
```

```
int i = 5;
int j = 10;
swap( &i, &j );
printf("%d %d", i, j);
```

Output

```
5 10
```

- Note that copies of the addresses are passed as formal parameters
  - Variables a and b are local copies
- Doing so will only swap the local copies

# Why Not Swap the Pointers?

```
void swap( int *a, int *b )
{
    int *temp = a;
    a = b;
    b = temp;
}
```

```
int i = 5;
int j = 10;
swap( &i, &j );
printf("%d %d", i, j);
```

# Call by Reference for Efficiency

- Recall: When a structure variable is passed as an input argument to a function, all its component values are **copied** into the local structure variable
- Passing entire copy of a structure can be inefficient, especially for large structs
- **For efficiency, pass a copy of the address of structure to function**
- **This can be done using pointer to struct as function parameter**

```
typedef struct student_info {
    char name[40];
    int student_id;
    int age;
} StudentInfo;

void print_student(StudentInfo s)
{
    printf("Name: %s\n", s.name);
    printf("Student ID: %d\n", s.id);
    printf("Age: %d\n", s.age);
}

...

StudentInfo s1 = {"John", 12345, 20};
print_student(s1);
```

# Call by Reference for Efficiency

```
typedef struct student_info {
    char name[40];
    int student_id;
    int age;
} StudentInfo;

void print_student(StudentInfo *s)
{
    printf("Name: %s\n", s->name);
    printf("Student ID: %d\n", s->id);
    printf("Age: %d\n", s->age);
}

...

StudentInfo s1 = {"John", 12345, 20};
print_student(&s1);
```

Copy of address of s1 is passed instead of a copy of the entire structure s1

# Call by Reference: Placing Restrictions

```
...  
  
void print_student(StudentInfo *s)  
{  
    printf("Name: %s\n", s->name);  
    printf("Student ID: %d\n", s->id);  
    printf("Age: %d\n", s->age);  
  
    s->age = 1000;  
}  
  
...
```

- `print_student()` can actually modify the value of `s`
- How to restrict function from modifying parameters passed by reference?
- Add `const` modifier to parameter

# Call by Reference: Placing Restrictions

```
...  
  
void print_student(const StudentInfo *s)  
{  
    printf("Name: %s\n", s->name);  
    printf("Student ID: %d\n", s->id);  
    printf("Age: %d\n", s->age);  
  
    s->age = 1000; // compiler will not  
                 // allow this  
  
}  
  
...
```

- `print_student()` can actually modify the value of `s`
- How to restrict function from modifying parameters passed by reference?
- Add `const` modifier to parameter

# Function Returning a Pointer

- Functions can return a pointer
- **Make sure that returned pointer points to a valid memory location**

```
float *find_max(float A[], int N)
{
    int i;
    float *the_max = &(A[0]);
    for (i = 1; i < N; i++)
        if (A[i] > *the_max) the_max = &(A[i]);
    return the_max;
}

int main(void)
{
    float scores[5] = {10.0, 8.0, 5.5, 2.0, 4.1};
    float *max_score;

    max_score = find_max(scores, 5);
    printf("%.1f\n", *max_score);
    return 0;
}
```



# Storage Classes

# Variable Lifetime and Scope

**Variables have lifetime\***: it begins when the variable is allocated memory and ends when the memory is “de-allocated”


**Variables have scope**: these are parts of the program where a variable is visible

\*Lifetime is also known as **storage duration**

# Lifetime

- **Static**
  - A static variable exists for the entire program execution duration; allocated memory when program starts
- **Automatic**
  - An automatic variable exists within a block that contains it; allocated memory when execution enters the block and de-allocated when execution leaves the block
- **Dynamic**
  - A dynamic variable exists from allocation to de-allocation of memory; allocation and de-allocation are done explicitly through dynamic memory allocation function calls

# Lifetime

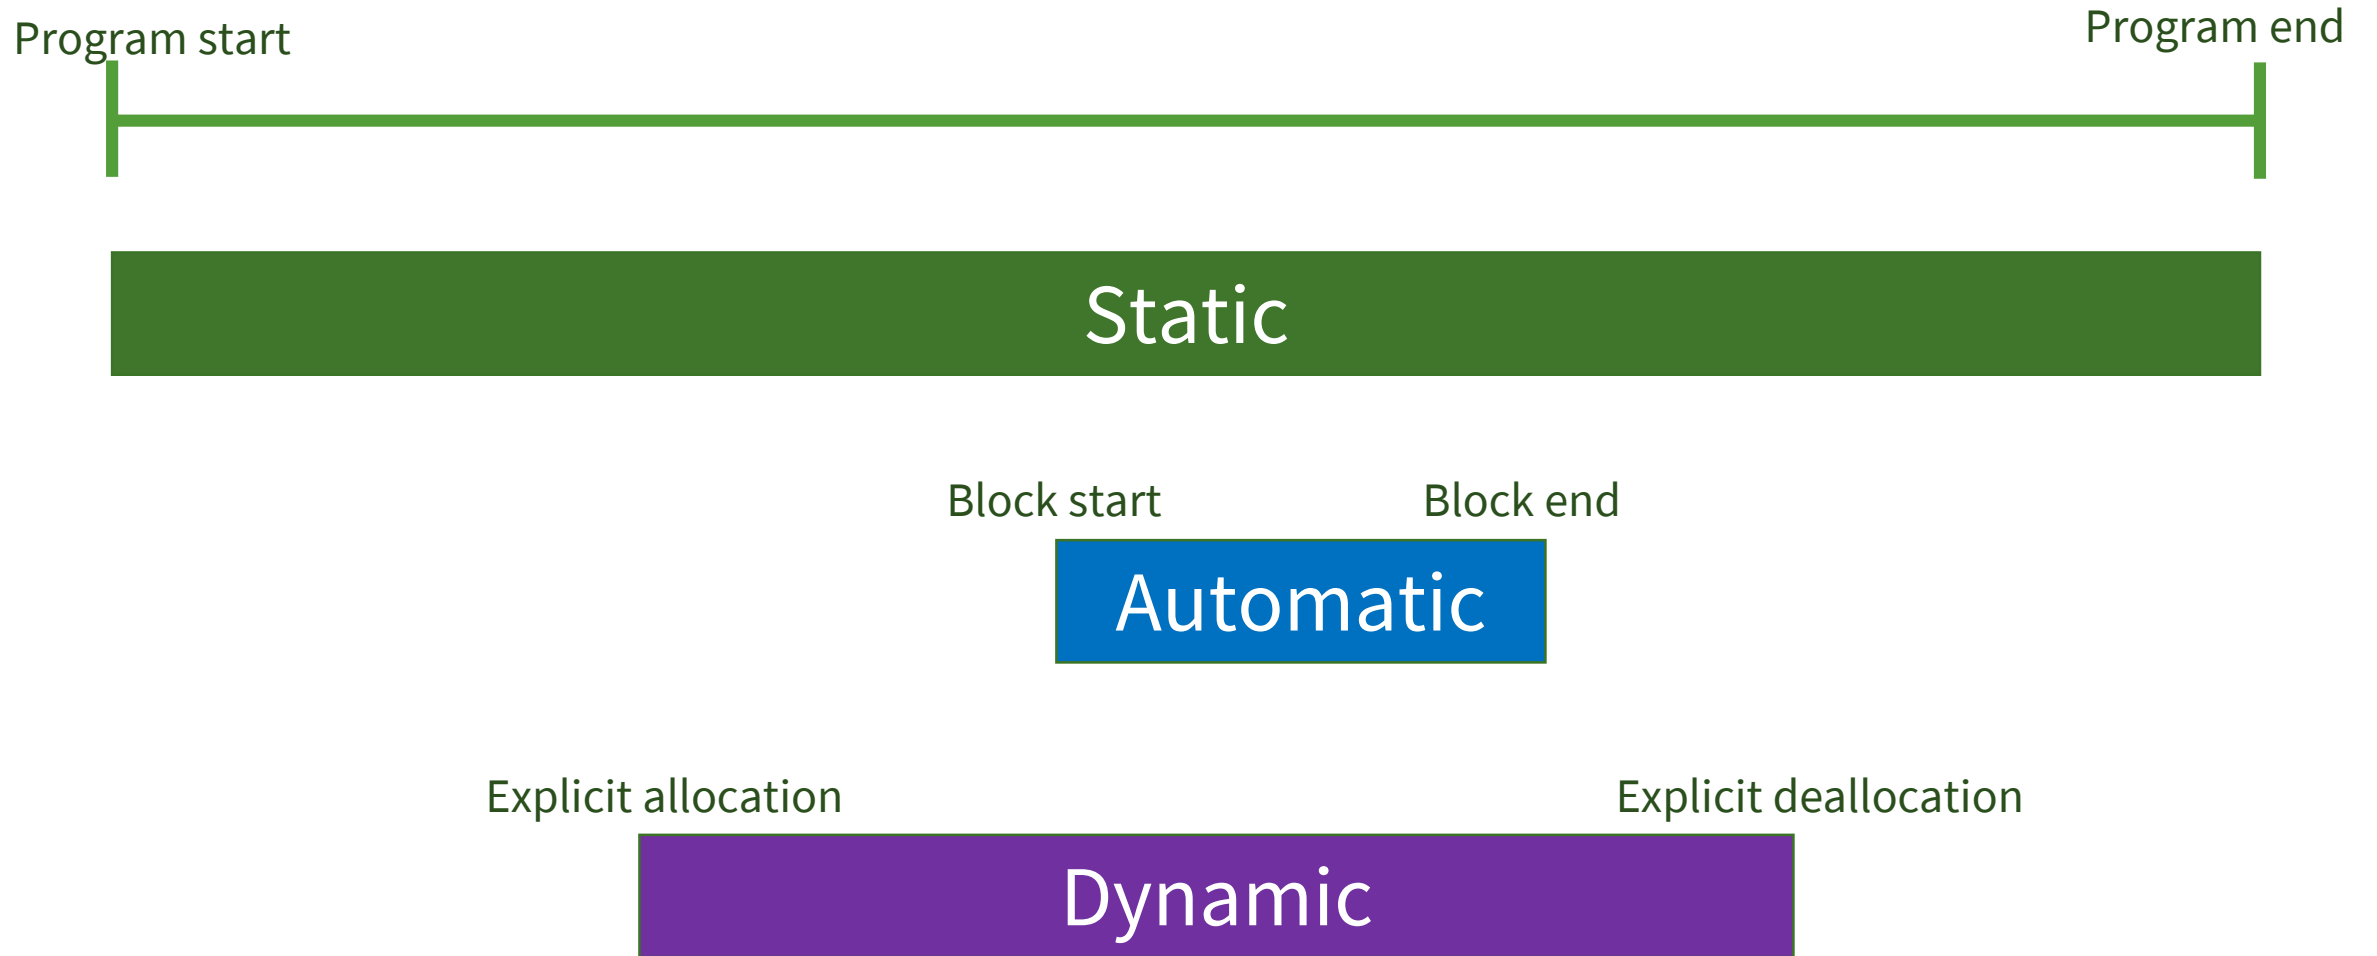


# Scope


- **Local**
  - A local variable is only visible inside the current, innermost block
- **Global**
  - A global variable is visible in the *whole* compilation unit, from the line of declaration to the end of file
- **External**
  - An external variable is visible in *all* compilation units

# Local Scope

file1.c

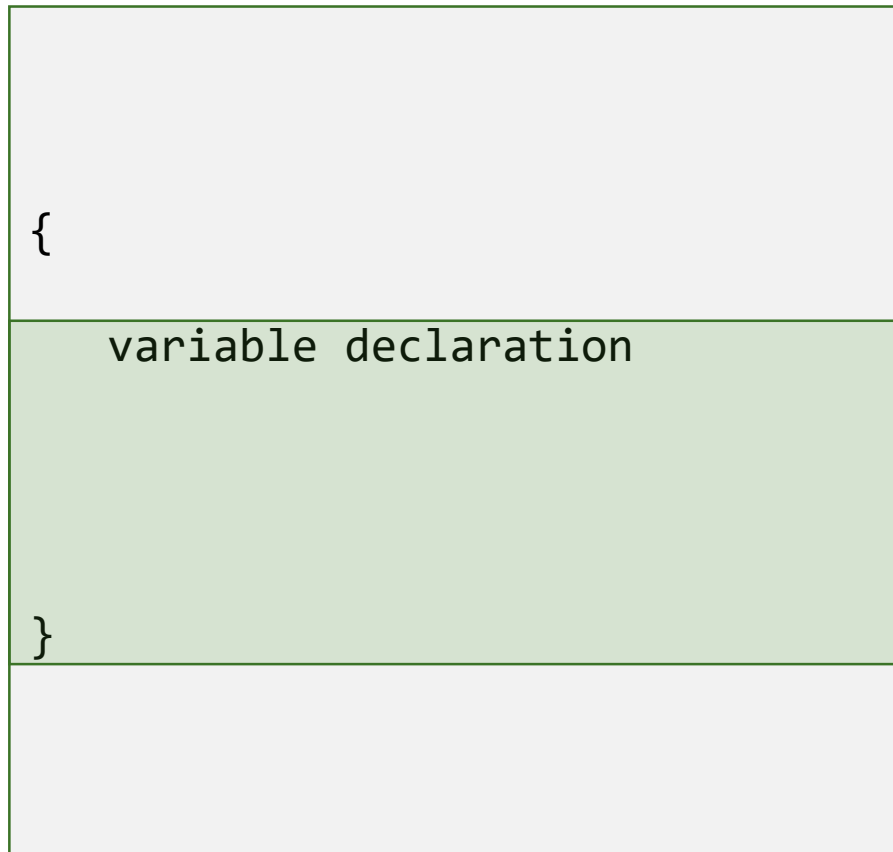


file2.c

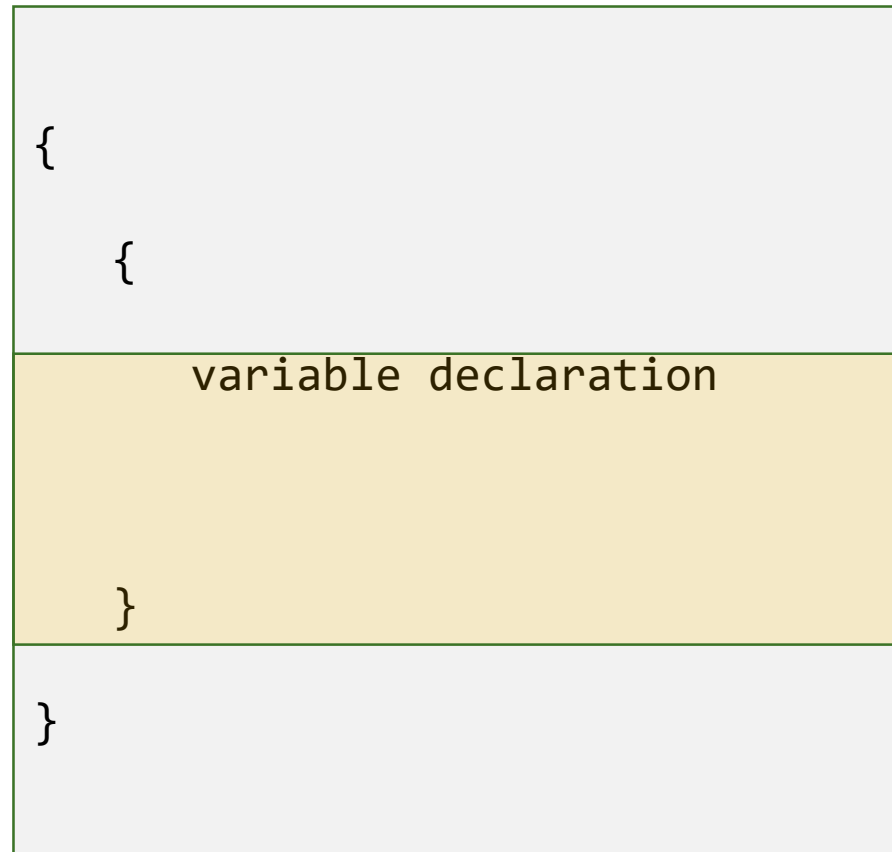


# Global Scope

file1.c

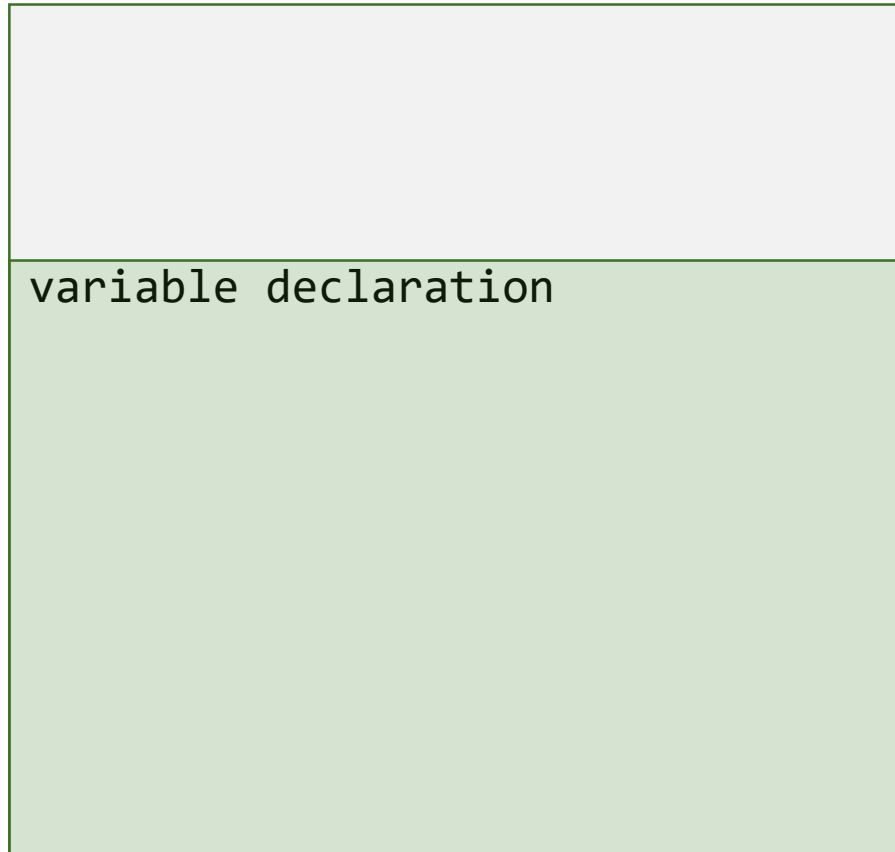


file2.c

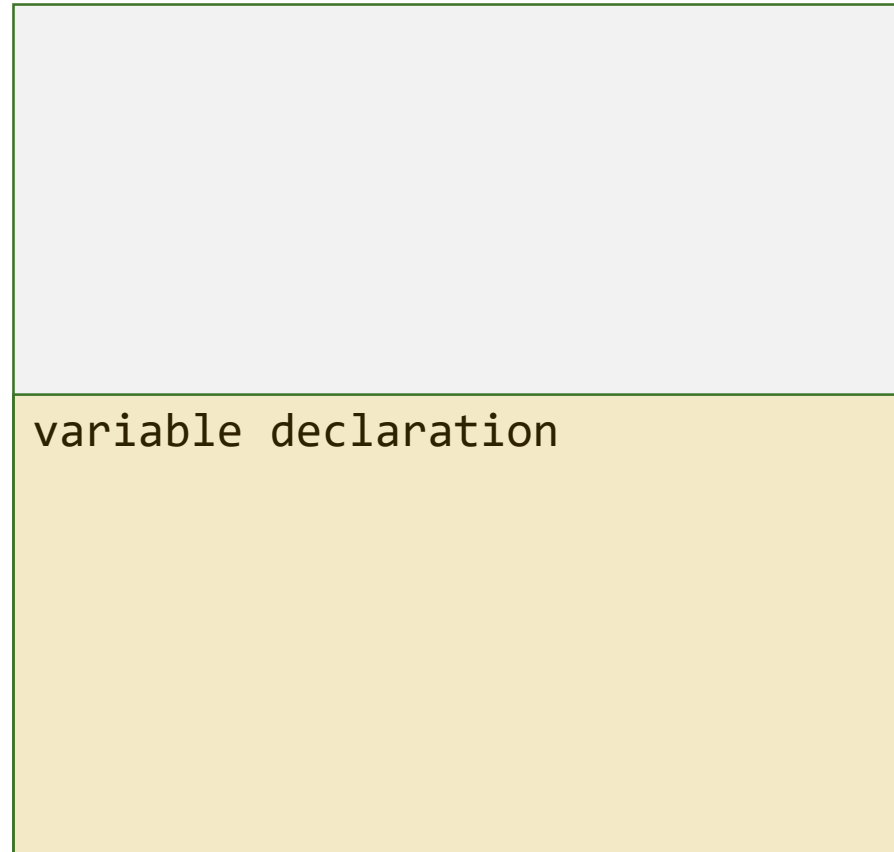

# External Scope

file1.c

file2.c

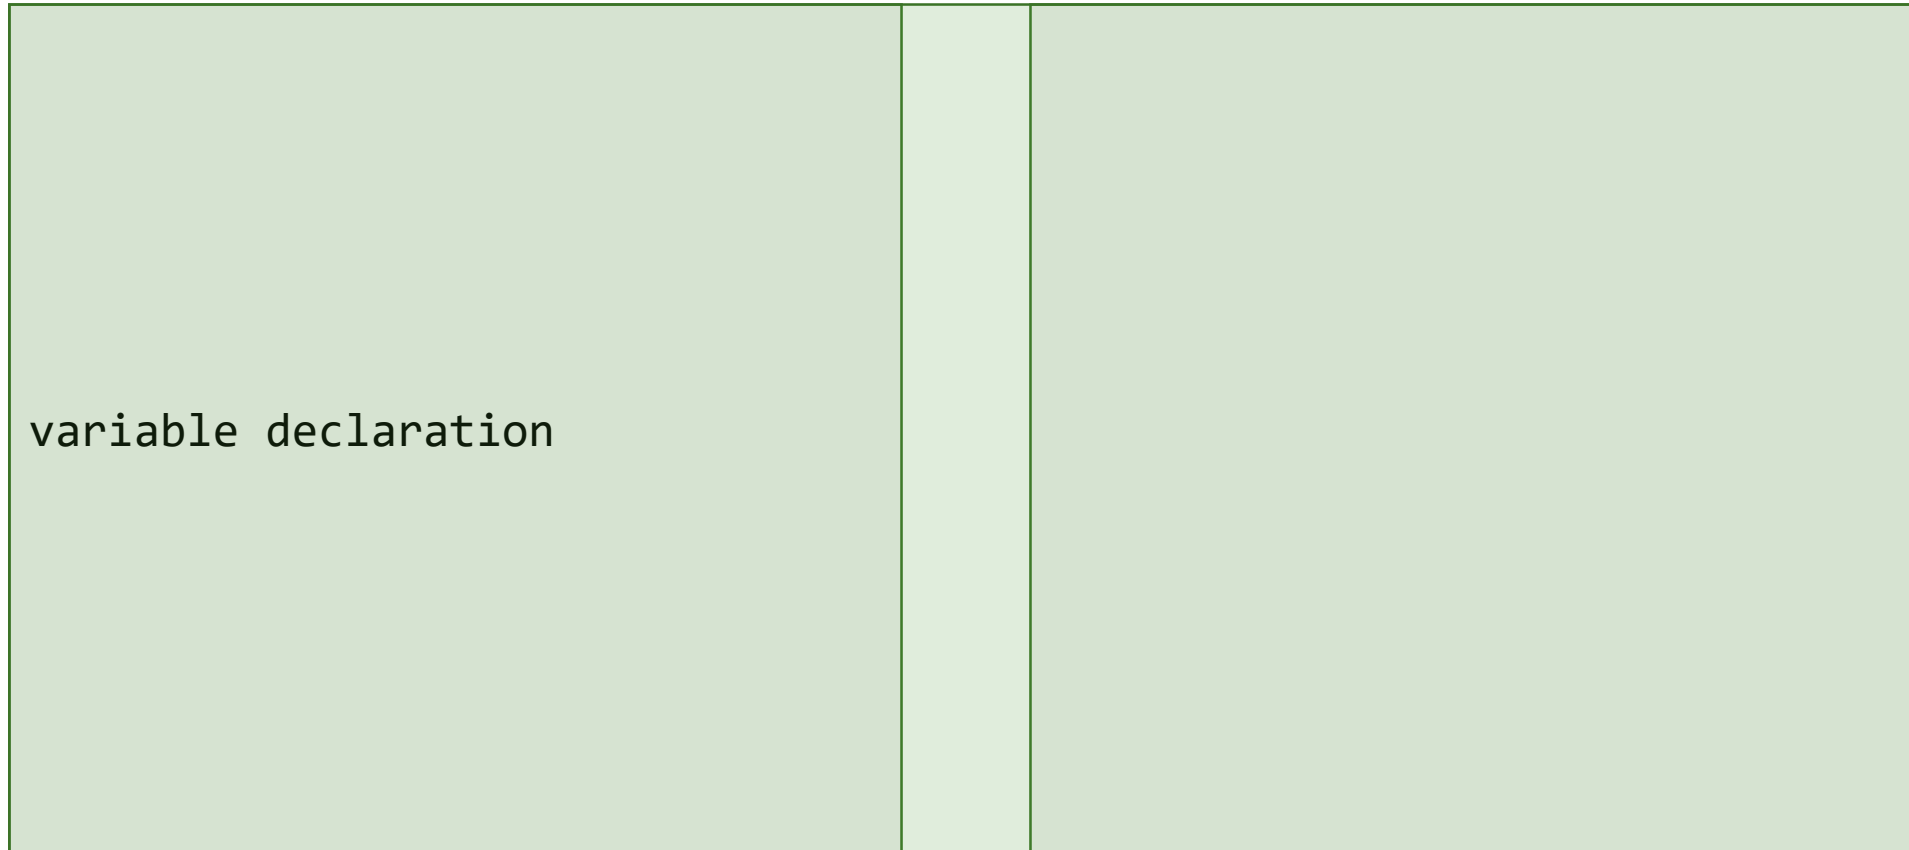



# Storage Classes at a Glance

C storage class	Declaration	Default init value	Init frequency	Stored in	Scope	Lifetime
<code>auto</code>	Inside block	Garbage	Every time block is entered	Memory	Local	Automatic
<code>static</code>	Inside block	0	Once at program start	Memory	Local	Static
	Outside any block	0	Once at program start	Memory	Global	Static
<code>extern</code>	Outside any block	0	Once at program start	Memory	External	Static
<code>register</code>	Inside block	Garbage	Every time block is entered	Maybe in register	Local	Automatic

# auto Storage Class Declaration

```
{  
    auto double x; /* Same as: double x */  
    int num;      /* Same as: auto int num; */  
    ...  
}
```

- **auto** is the default storage class for a variable defined inside a function body or a statement block
- **auto** prefix is optional; *i.e.*, any locally declared variable is automatically **auto**, unless specifically defined to be static

# auto Storage Class Example (Scope)

```
int func(float a, int b)
```

```
{
```

```
int i;
```

i is visible from this point to end of **func**

```
double g;
```

g is visible from this point to end of **func**

```
for (i = 0; i < b; i++) {
```

```
double h = i*g;
```

h is only visible from this point to end of loop!

```
// Loop body - may access a, b, i, g, h
```

```
} // end of for-loop
```

```
// func body - may access a, b, i, g
```

```
} // end of func()
```

# auto Storage Class Example (Lifetime)

```
int func(float a, int b)
{
  int i; ← Storage for i allocated
  double g; ← Storage for g allocated

  for (i = 0; i < b; i++) {
    double h = i*g; ← Storage for h allocated
    // Loop body - may access a, b, i, g, h
  } // end of for-loop ← Storage for h released
  // func body - may access a, b, i, g
} // end of func() ← Storage for i released
                        ← Storage for g released
```

The diagram illustrates the lifetime of auto storage class variables in a C++ function. It shows the following sequence of events:

- At the start of the function, storage for **i** is allocated (green box).
- Storage for **g** is allocated (blue box).
- Inside the for-loop, storage for **h** is allocated (yellow box).
- At the end of the for-loop, storage for **h** is released (yellow box).
- At the end of the function, storage for **i** is released (green box).
- Storage for **g** is released (blue box).

# static Storage Class Declaration

- The **static** prefix *must* be included

```
{  
  
    static double local_static;  
    ...  
}
```

```
void func1(int a)  
{  
    ...  
}  
  
static int global_static;  
  
void func2(int b)  
{  
    ...  
}
```

# extern Storage Class Declaration

- extern is the default storage class for a variable defined *outside* any function's body

```
void func1(int a)
{
    ...
}

int global;

void func2(int b)
{
    ...
}
```

# extern Storage Class Example 1

```
#include <stdio.h>

float x = 1.5;

void show (void)
{
    printf("%f\n", x); /* Access external x */
}

int main (void)
{
    printf("%f\n", x); /* Access external */
    show();
    return 0;
}
```

# extern Storage Class Example 2a

What if `x` is defined after `main` and you want to use it in `main`?

```
#include <stdio.h>

extern float x;

void show (void)
{
    printf("%f\n", x); /* Access external x */
}

int main (void)
{
    printf("%f\n", x); /* Access external x */
    show();
    return 0;
}

float x = 1.5;
```



# extern Storage Class Example 2b

What if x is defined in another source file?

```
#include <stdio.h>

void show (void);

float x = 1.5;


int main (void)
{
    printf("%f\n", x); /* Access external x */
    show();
    return 0;
}
```

```
#include <stdio.h>

extern float x;

void show (void)
{
    printf("%f\n", x); /* Access external x */
}
```

# register storage class

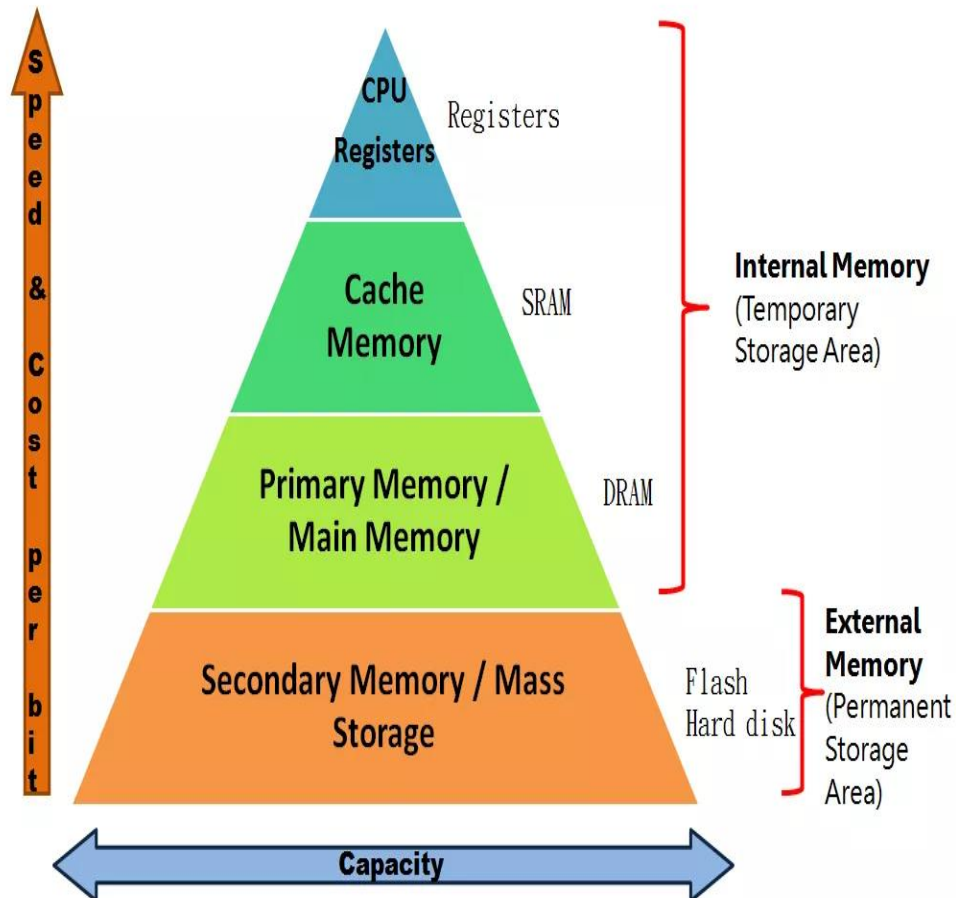

- The fastest storage resides within the CPU itself in high-speed memory cells called *registers*
- The programmer can *request* the compiler to use a CPU register for storage

- Example:

```
register int k;
```


# register storage class

- The request can be ignored, in which case the storage class defaults to auto
- A register variable is local to the block which contains it

# C Process Layout


# C Process Layout

- Memory space for program code includes space for machine language **code** and **data**
- **Text / Code Segment**
  - Contains program's machine code
- Data spread over:
  - **Data Segment** – Fixed space for global variables and constants
  - **Stack Segment** – For temporary data, *e.g.*, local variables in a function; expands / shrinks as program runs
  - **Heap Segment** – For dynamically allocated memory; expands / shrinks as program runs

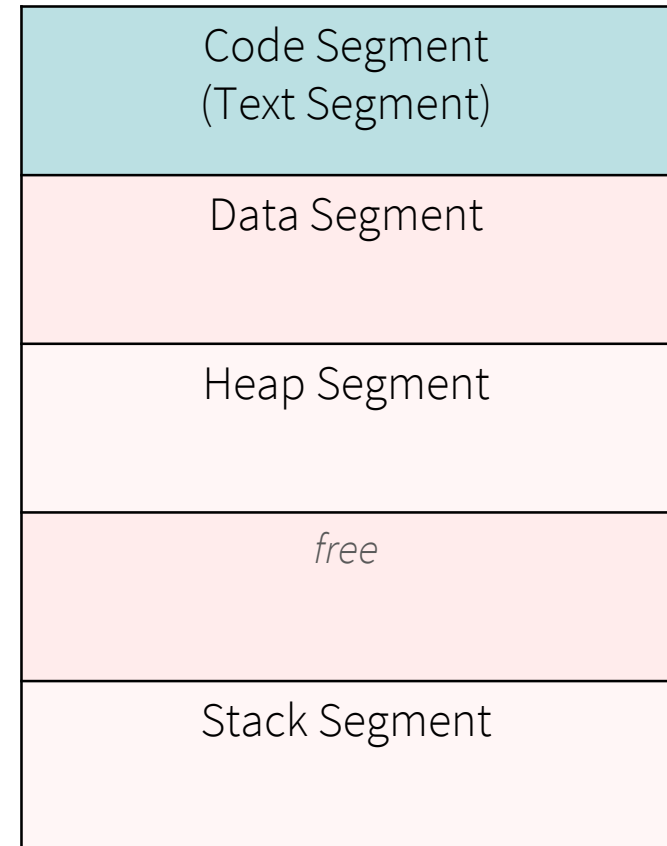



# C Process Layout

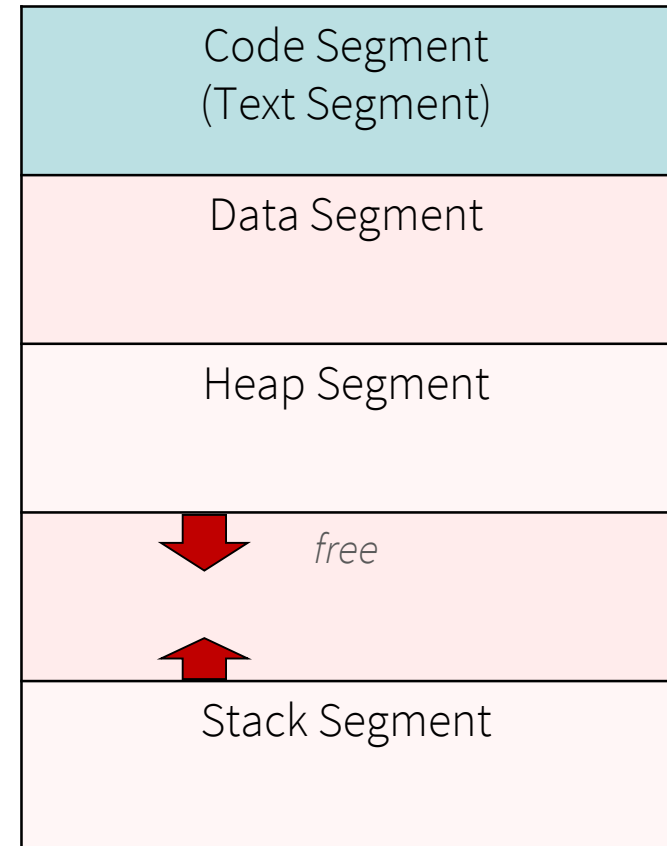- Memory space for program code includes space for machine language **code** and **data**
- **Text / Code Segment**
  - Contains program's machine code
- Data spread over:
  - **Data Segment** – Fixed space for global variables and constants
  - **Stack Segment** – For temporary data, e.g., local variables in a function; expands / shrinks as program runs
  - **Heap Segment** – For dynamically allocated memory; expands / shrinks as program runs



# Storage Layout

- Where are auto, static, and extern variables stored?

Contains the program's machine code	Code Segment (Text Segment)
Contains static data (e.g., <b>static</b> class, <b>extern</b> class)	Data Segment
Contains dynamically allocated data – later...	Heap Segment
Unallocated memory that the stack and heap can use	 <i>free</i> 
Contains temporary data (e.g., <b>auto</b> class)	Stack Segment

# Next Lecture

- Dynamic Memory Allocation