



EXAMINATIONS — 2010

END-OF-YEAR

**COMP 102
INTRODUCTION TO
COMPUTER PROGRAM
DESIGN**

Time Allowed: 3 Hours

Instructions: Attempt ALL Questions.

Answer in the appropriate boxes if possible — if you write your answer elsewhere, make it clear where your answer can be found.

The exam will be marked out of 180 marks.

Non-programmable calculators without a full alphabetic key pad are permitted.

Non-electronic foreign language dictionaries are permitted.

Java Documentation will be provided with the exam script

There are spare pages for your working and your answers in this exam.

Questions

	Marks
1. Understanding Java	[40]
2. Event driven input	[15]
3. Files	[25]
4. Arrays	[45]
5. Arrays of Objects	[40]
6. Interface classes	[15]

SPARE PAGE FOR EXTRA ANSWERS

Cross out rough working that you do not want marked.
Specify the question number for work that you do want marked.

Question 1. Understanding Java

[40 marks]

(a) [5 marks] What will the following fragment of Java print out?

```

int x = 2;
int y = 4;
y = y + 1;
x = y;
Ul.println ("x=" + x + " y=" + y + " " + (x * y));
y = x;
y = y + 1;
Ul.println ("x=" + x + " y=" + y);

```

(b) [6 marks] Consider the following choice method (note the **if**'s and **else**'s carefully):

```

public void choice(int x, int y) {
    if (x < 10 && y > 20){
        Ul.print ("1st ");
    }
    if (x >= 5 || y > 10) {
        Ul.print ("2nd ");
    }
    else if (x < 10 && y==5){
        Ul.print ("3rd ");
    }
    else {
        Ul.print ("4th ");
    }
    Ul.println ();
}

```

What would the following calls to choice print out?

```

choice(3, 5)  =>
choice(5, 25) =>
choice(4, 6)  =>

```

(Question 1 continued on next page)

(Question 1 continued)

(c) [5 marks] What will the following fragment of Java print out?

```
int i = 2;
int k = 1;
while (k <= 10){
    Ul.println (k + " " + (i * k));
    k = k + 3;
}
Ul.println ("Done");
```

(d) [8 marks] Consider the following two methods. If the `testNumbers` method is called, what will it print out?

```
public int twoNumbers(int x, int y){
    if (x > y)
        return x;
    else
        return y + 10;
}
public void testNumbers(){
    Ul.println (this.twoNumbers(10, 5));
    int x = 2;
    int y = this.twoNumbers(x,10) + 1;
    Ul.println (this.twoNumbers(x, y));
    Ul.println (this.twoNumbers(y, x));
}
```

(e) [8 marks] What will the following fragment of Java print out if the user enters the following in response to the prompt:

It has 15 circles and 2 triangles but no rings

```
UI.println ("Input: ");
while ( true ){
    String word = UI.next();
    if ( word.equals("but"))
        break;
    if (UI.hasNextInt()) {
        UI.println (UI.nextInt ());
    }
    else {
        UI.println (word);
    }
}
UI.println ("Done");
```

Input: It has 15 circles and 2 triangles but no rings

(Question 1 continued)

(f) [8 marks] Complete the following definition of a `Shoe` class. `Shoe` objects should have two fields called `brand` and `size`. `brand` should hold a `String`, and `size` should hold an integer to specify the size of the shoe.

The class should have a constructor that takes two arguments and sets the fields to its arguments. The class should have one method called `toString` (with no parameters) to return a `String` that contains the values of both fields.

```
public
```

```
}
```

SPARE PAGE FOR EXTRA ANSWERS

Cross out rough working that you do not want marked.
Specify the question number for work that you do want marked.

Question 2. Event-Driven Input


[15 marks]

Consider the `PatternWriter` class on the facing page, which constructs a simple GUI with two buttons and responds to the mouse. It has two fields that store a position (`xPos`, `yPos`), and the initial position is at (100, 100).

Sketch below what the program would draw on the graphics pane if the user took the following actions in sequence:

1. press and release mouse at point 1
2. press and release mouse at point 2
3. press the "1st" button
4. press and release mouse at point 3
5. press and release mouse at point 4
6. press the "2nd" button
7. press and release mouse at point 5
8. press and release mouse at point 6

please note that the two positions with coordinates (100,100) (300,300) are given in the figure.

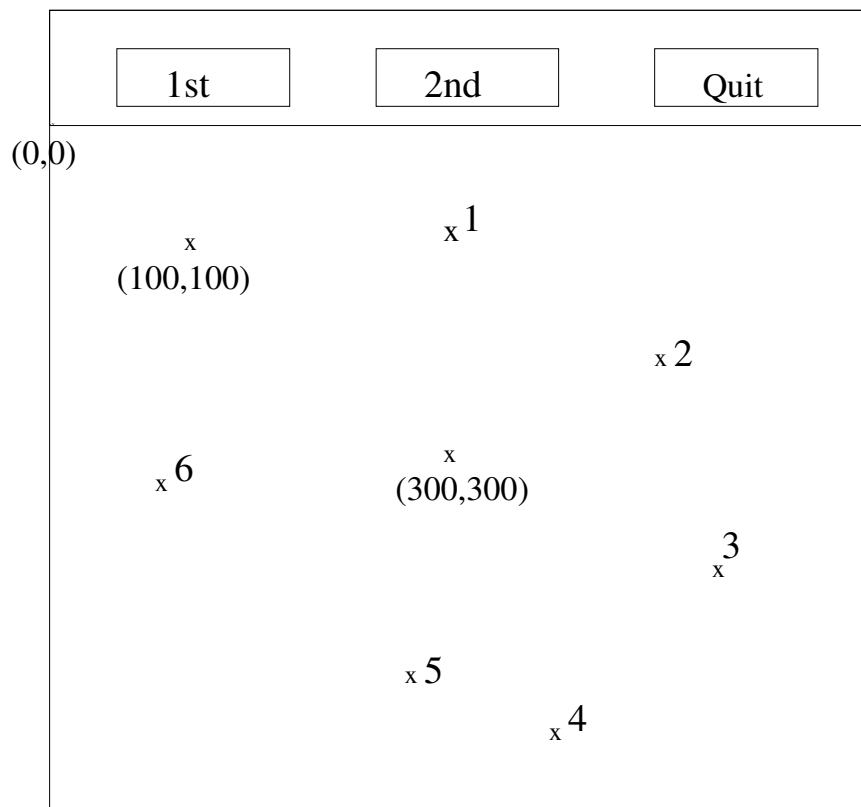

(Question 2 continued on next page)

(Question 2 continued)

```
public class PatternWriter implements UIButtonListener, UIMouseListener{
    private double xPos = 100;
    private double yPos = 100;

    public PatternWriter(){
        UI.setMouseListener(this);

        UI.addButton("1st", this);
        UI.addButton("2nd", this);
    }
    public void buttonPerformed(String cmd){
        if (cmd.equals("1st")){
            UI.drawOval(this.xPos-10, this.yPos-10, 20, 20);
        }
        else if (cmd.equals("2nd")){
            this.xPos = 300;
            this.yPos = 300;
            UI.drawOval(this.xPos-10, this.yPos-10, 20, 20);
        }
    }
    public void mousePerformed(String action, double x, double y){
        if (action.equals("released")) {
            UI.drawLine(this.xPos, this.yPos, x, y);
            this.xPos = x;
            this.yPos = y;
        }
    }
}
```

Question 3. Files

[25 marks]

Suppose the file `Data.txt` contains data about tutor working hours. Each line of the file contains information about one tutor: the tutor's name, the hours worked during a week (up to 5 integers or none). For example, the following might be the first five lines of the file.

```
Alan 5 6
Bob 3 1 4 2 1
Frank
Kris 2 3
Peter 4
```

(a) [7 marks] What would the following method print out if `Data.txt` only had the five lines shown above?

```
public void printFile (){
    try{
        Scanner scan = new Scanner (new File("Data.txt"));

        while ( scan.hasNext() ){
            UI.println (scan.next ());
            if (scan.hasNextInt()){
                scan.nextInt ();
            }
        }
        scan.close();
    }
    catch(IOException e){UI.println("File reading failed");}
}
```

(b) [8 marks] Complete the following `printNames` method to print out all the tutor names in the file and ignore other information. For example, if the file only had the five lines in the example above, `printNames` should print

```
Alan
Bob
Frank
Kris
Peter
```

```
public void printNames(){
    try{
        Scanner scan = new Scanner(new File("Data.txt"));

        scan.close();
    }
    catch(IOException e){UI.println("File reading failed");}
}
```

SPARE PAGE FOR EXTRA ANSWERS

Cross out rough working that you do not want marked.
Specify the question number for work that you do want marked.

(c) [10 marks] Complete the following `printSummary` method to print out the name and the total working hours for each tutor. It should also print out the name and working hours of the tutor who has worked the most of hours. If there is a tie, you may just print one of them.

For example, if the file only had the five lines in the example above, `printSummary()` should print out

```
Alan:11
Bob:11
Frank:0
Kris:5
Peter:4
Tutor with most hours: Alan 11
```

```
public void printSummary(){
    try{
        Scanner scan = new Scanner(new File("Data.txt"));

        scan.close();
    } catch(IOException e){UI.println("fail");}
}
```

Question 4. Array

[45 marks]

(a) [9 marks] For each of the following statements, write code to declare and create an array to represent the data. If you need any supporting classes, state the name of the class, and specify the types and the names of its data fields. The first one is done for you as an example. You may make your own assumptions about array size if necessary.

(i) students' test marks for a class of 40 students

```
double[] marks = new double[40]
```

no supporting class is needed

(ii) students' names for a class of 25 students.

(iii) credit-card transactions that contain a transaction number, a merchant name and a charge.

(iv) students' names for a class and homework grades for each student.

(b) [8 marks] Suppose the variable `words` is declared and initialised as follows:

```
String [ ] words = new String [ ] { "dog", "bee", "fox", "cat", "ant", "eel" };
```

words:

dog	bee	fox	cat	ant	eel
0	1	2	3	4	5

What will the following code fragment print out?

```
UI.println (words[3]);
UI.println (words.length);
UI.println (words[4].length ());
for ( int j = words.length-1; j >= 0; j--){
    UI.print (words[j]+ " ");
}
UI.println ();
```

(c) [10 marks] What will the following method print out?

```
public void test2D(){
    int [][] nums = new int [][] {{2, 3, 5, 1},
                                   {4, 2, 5, 7},
                                   {8, 1, 0, 2}};

    UI.println (nums[1][3]);
    UI.println (nums.length);
    UI.println (nums[0].length);

    for( int r = 0; r < nums.length; r++) {
        int total =0;
        for( int c = 0; c < nums[r].length; c++) {
            UI.print (nums[r][c]+ " ");
            total = total + nums[r][c];
        }
        UI.println ( total );
    }
}
```


(d) [8 marks] Complete the following `mean` method. `mean` has one parameter – an array of `int` – and should return the mean of the values in the array. You may assume that the array is not null and the length of the array is not zero.

```
public double mean(int [ ] data){
```

```
}
```

(e) [10 marks] Complete the following `reverse` method. `reverse` has one parameter – an array of `int` – and should reverse the order of the values in the array. For example, given the array {10, 4, 3, 7, 8, 5} it should change it to be {5, 8, 7, 3, 4, 10}. You may assume that the array is not null.

```
public void reverse(int [ ] data){
```

```
}
```

Question 5. Arrays of Objects

[40 marks]

This question concerns an `AccountManager` class to manage a list of accounts. The class stores the information about the accounts in a field containing an array of `Account` objects. It also has a `count` field that contains the number of `Accounts`, and the `Accounts` are stored in cells 0 through `count-1` of the array. The `AccountManager` class includes methods to list all the accounts, add an account to the list, and remove a specified account, etc.

Part of the `Account` class, for representing information about individual accounts, is shown below.

```
public class Account{
    private int no;
    private double balance;

    public Account(int n, double d){
        this.no = n;
        this.balance = d;
    }

    public String toString(){
        return this.no + " " + this.balance;
    }

    public int getNo(){
        return this.no;
    }

    public double getBalance(){
        return this.balance;
    }

    public void deposit(double m){
        this.balance = this.balance + m;
    }

    public void withdraw(double m) {
        this.balance = this.balance -m;
    }
}
```

(Question 5 continued)

The following are some of the fields and one of the methods of the `AccountManager` class:

```
public class AccountManager{

    private int maxAccounts = 30;
    private int count = 0;
    private Account[] accountList = new Account[maxAccounts];

    public void testAccounts(){
        Account a1 = new Account(123, 1000.0);
        Account a2 = new Account(146, 3000.0);
        Account a3 = new Account(244, 2000.0);

        this.accountList[0] = a1;
        this.count++;
        this.accountList[this.count] = a2;
        this.count++;

        Ul.println ("1: " + a3.getBalance());
        Ul.println ("2: " + this.accountList[0].toString ());
        Ul.println ("3: " + this.accountList[1].getNo());

        this.accountList[1].deposit(500.0);

        for(int i=0; i<this.count; i++){
            Ul.println (i + ": " + this.accountList[i].toString ());
        }
    }
}
```

(a) [8 marks] What will the `testAccounts` method print out?

SPARE PAGE FOR EXTRA ANSWERS

Cross out rough working that you do not want marked.
Specify the question number for work that you do want marked.

(b) [10 marks] Complete the following `displayAccounts` method of the `AccountManager` class which should print the details of each account, including the account number and the account balance.

```
public void displayAccounts(){
```

```
}
```

(c) [10 marks] Complete the following `findAccountIndex` method of the `AccountManager` class which should return the index of an `Account` object with the specified account number. If the account is not found, it should return -1.

```
public int findAccountIndex(int n){
```

```
}
```

SPARE PAGE FOR EXTRA ANSWERS

Cross out rough working that you do not want marked.
Specify the question number for work that you do want marked.

(d) [12 marks] Complete the following `deleteAccount` method in the `AccountManager` class which should remove the account of the specified account number.

It is important that there should be no nulls in the array in the range from 0 to `count-1`. The order the accounts stored in the list is important and should not be changed.

The `deleteAccount` method should print a message if the account is not found.

Hint: You may use the method defined in the previous question if you wish.

```
public void deleteAccount(int n){
```

```
}
```

SPARE PAGE FOR EXTRA ANSWERS

Cross out rough working that you do not want marked.
Specify the question number for work that you do want marked.

Question 6. Designing with Interfaces

[15 marks]

Assignment 10 has many classes such as `Line` and `Dot` to implement the `Shape` interface. Suppose your task is to add more classes such as `Triangle`, `Ring` and `Star` to this program in the same way so your program can handle more shapes.

Here is the `Shape` interface given in the assignment.

```
public interface Shape{  
  
    public boolean pointOnShape(double x, double y);  
    public void moveBy(double dx, double dy);  
    public void render();  
    public void resize(int changeWd, int changeHt);  
    public String toString ();  
}
```

(a) [7 marks] Suppose you have added three new classes `Triangle`, `Ring` and `Star` to this program using the `Shape` interface. Comparing the three new classes mentioned, state their similarities. (You don't need to give any code)

(b) [8 marks] Explain the main advantages of using a `Shape` interface in this program.
